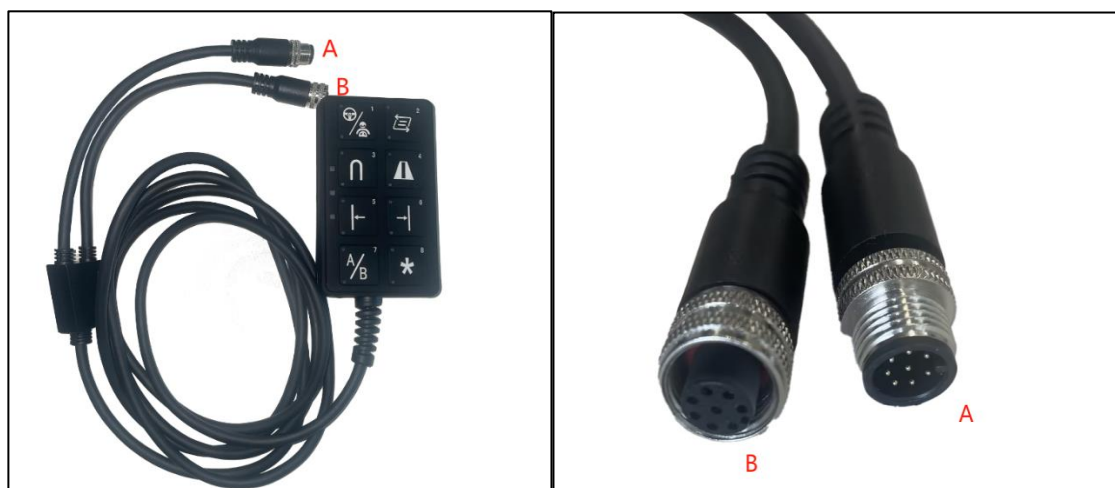# How to use multi-function button board

Introduction

To make it easier for users to operate the AGNAV software, the multi-function button board will be released (PN: 4190070032), which allows users to perform common functions without having to click the tablet screen.

Notification: It requires software version 20240224 or above.
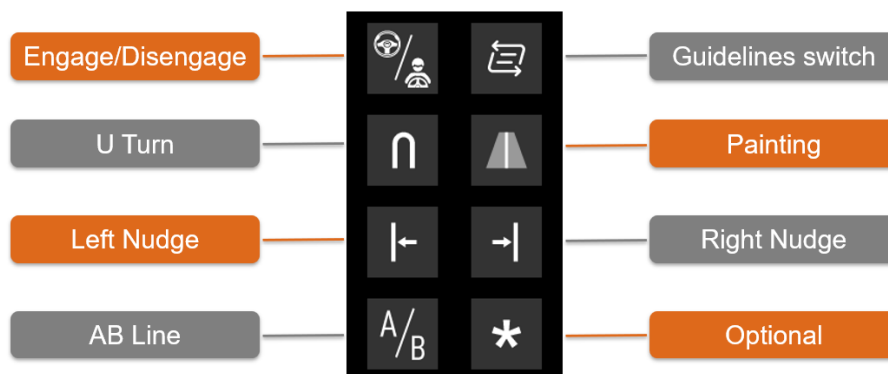
Connection Steps
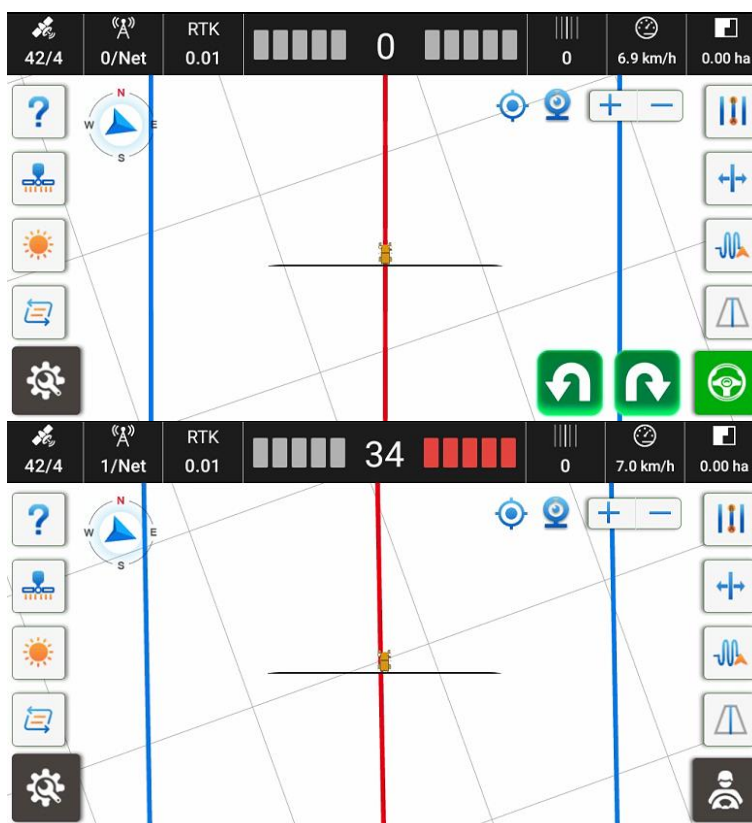
A: 8-pin male connector
B: 8-pin female connector

Connect the 8-pin male connector to the GASENSOR connector of the integrated main cable, then the button board indicator will light up. Finally connect the GASENSOR to the 8-pin female connector of the button board if necessary to use GASENSOR.
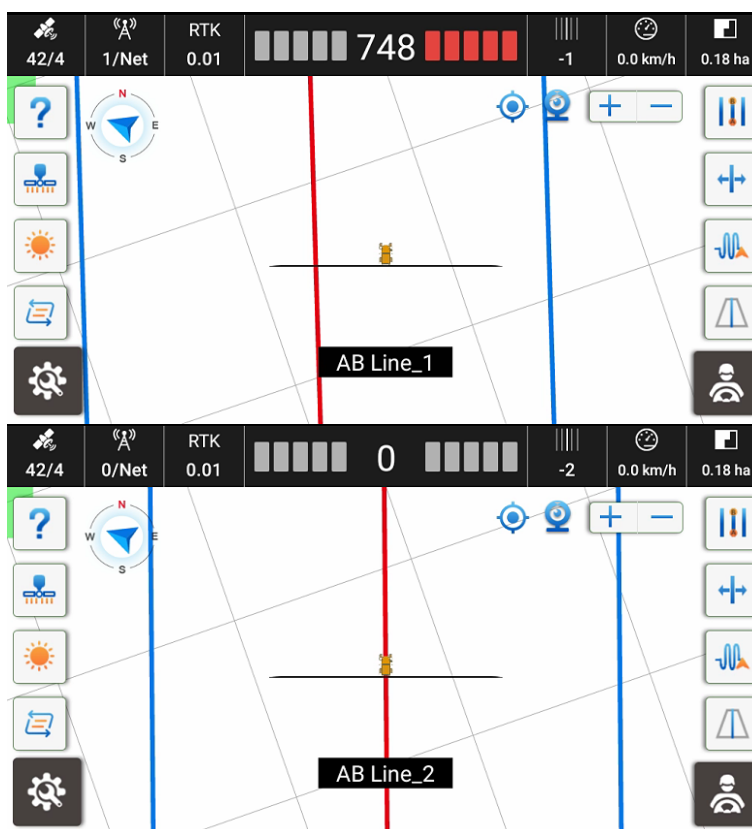
CHCNAV

Features

Engage/Disengage — Guidelines switch
U Turn — Painting
Left Nudge — Right Nudge
AB Line — Optional

 Engage/Disengage: Press this button to engage or disengage autopilot mode.
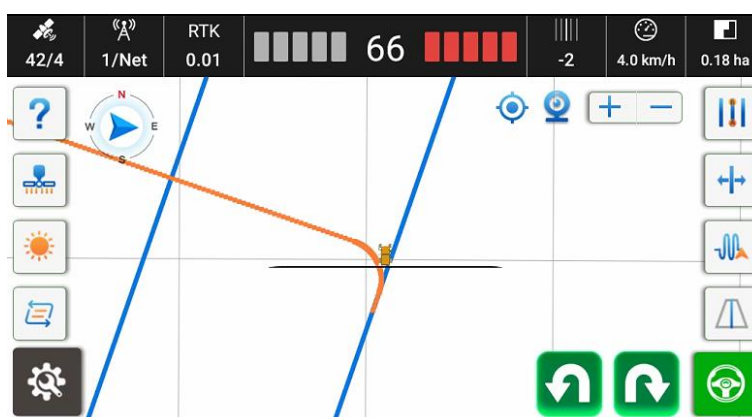
CHCNAV

Guidelines switch: Press this button to quickly switch guidelines when the field has multiple guidelines.
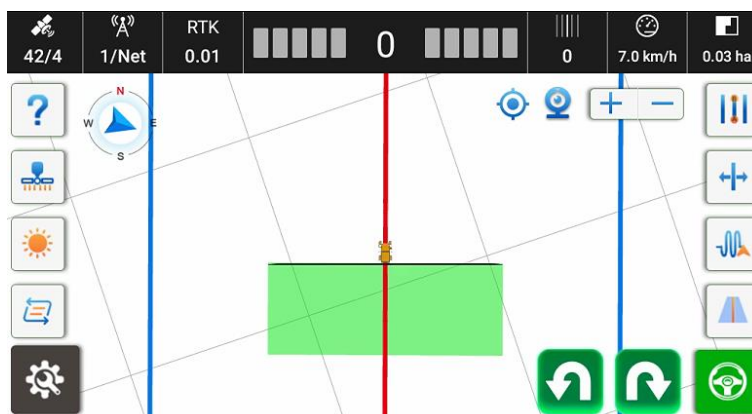

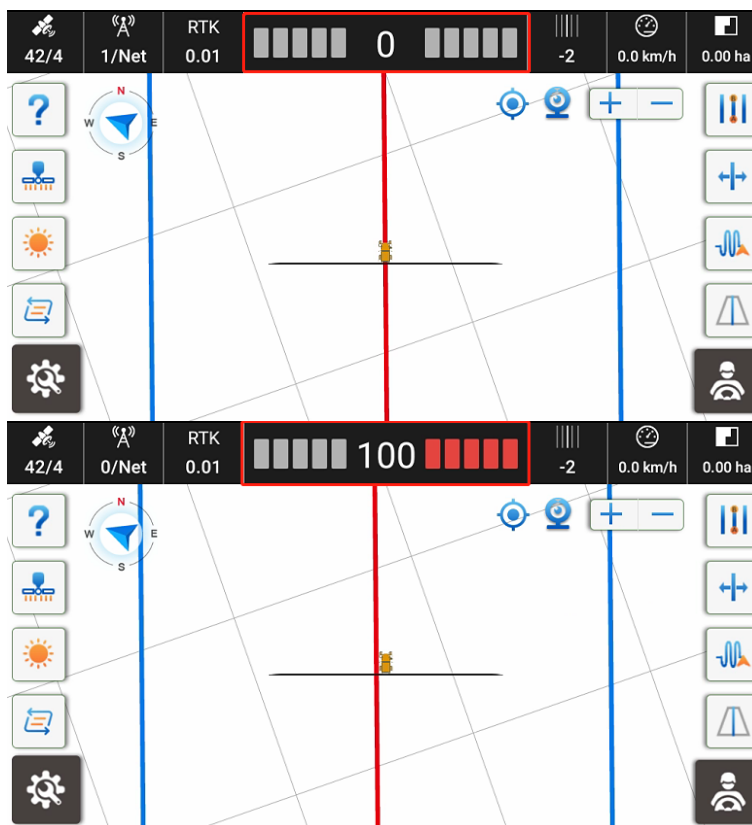**U Turn:** Press this button to trigger U-Turn.

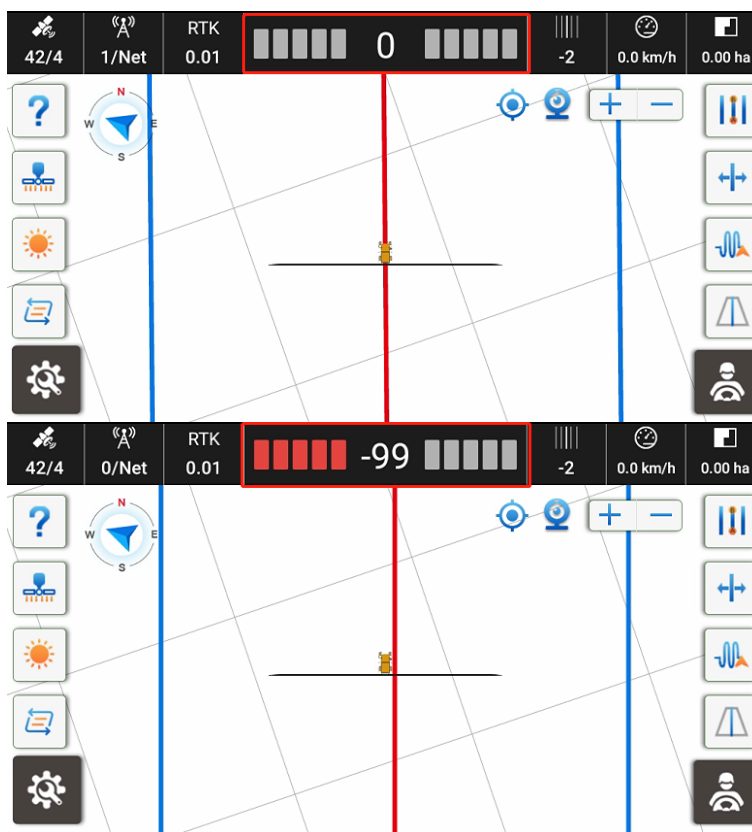**Painting:** Turn on/off the work coverage track manually.

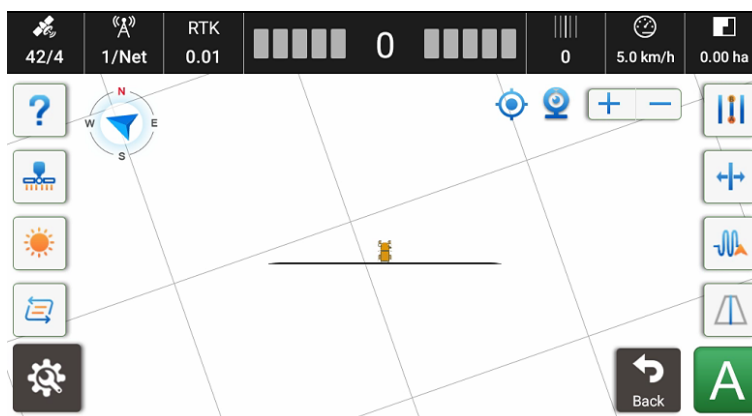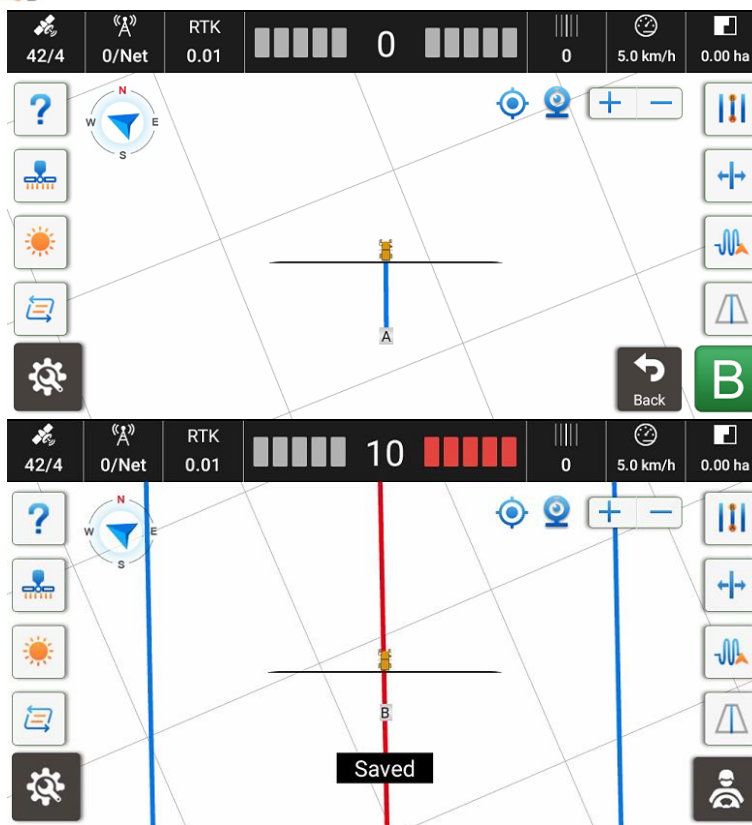**Left Nudge:** The guideline will be shifted to the left.

CHCNAV

Right Nudge: The guideline will be shifted to the right.

AB Line: It can support AB line quick creation.

| ✳ | **Optional:** No specific feature has been developed yet. |

CHC Navigation

Building C, 577 Songying Road, Qingpu, District,
201702 Shanghai, China

Tel: +86 21 542 60 273 | Fax: +86 21 649 50 963

Email: sales@chcnav.com | support@chcnav.com

Skype: chc_support

Website: www.chcnav.com